



48V 50ah LiFePO4 Rackmount Lithium Battery For Residential Commercial

Basic Information

Place of Origin: ChinaBrand Name: XWELL

 Certification: UN38.3,MSDS,UL,CB,BIS,PSE,GB4943.1 safety standard, CE, FCC, ROHS, battery

UN38.3, MSDS, UL, CB, BIS, PSE

Model Number: XW-5120W-1

Minimum Order Quantity: 1 pcsPackaging Details: Carton

• Delivery Time: 7-10 working days

• Payment Terms: L/C, D/A, D/P, T/T, Western Union,

MoneyGram

Supply Ability: 5000 pcs per month



Product Specification

• Full Voltage: 48V To 51.2V

Cell Type: LiFePO4 Prismatic BatteryFull Capacity: 50Ah 100Ah 200Ah

• Full Energy: 2.56Kwh 5.12Kwh 10.24Kwh (Optional)

Discharge Current: 50A
Max Charge Current: 50A
Discharge Cut-off Voltage: 42.5V
Display: LCD Optional

Communication Interface: RS485, RS232, CANCycle Life: >6000 Cycles(80%DOD)

• Highlight: LiFePO4 Rackmount Lithium Battery,

Residential Rackmount Lithium Battery, Commercial rack mount 48v battery

Product Description

48V 50ah Batteries Residential Commercial Solar Energy 5u Rackmount LCD LiFePO4 51.2V 100ah 200ah Lithium Battery

Pack modular design, strong universality, convenient installation, simple operation, independent maintenance, high reliability, safety, large space, conducive to ventilation and heat dissipation, is the main component of household power supply, lithium iron phosphate battery has along life, enough stability, more security and other characteristics.

New grade A cylindrical battery cells, the discharge rate is higher than the prismaticcells. Between the cell and the cell is fixed with a bracket to dissipate heat, the eff-ective heat dissipation area is more than 64 times that of the prismatic cells battery.

Features

- 1. Grade A cell, sort themto one grade(5mQ/2mVbefore assembly, stritlycontrol the consistencyof cells
- 2. Smart BMS control thebalance of series cells
- 3. Cells holder and purecorn connection strapto keep the stabiltyof cells
- 4. Full cycle before shipping
- 5. Screw fasternings

Rackmount Lithium Battery Specification


Model	51.2V50Ah	51.2V100Ah	51.2V200Ah		
Nominal voltage					
Nominal capacity (kwh)	2.56	5.12	10.24		
Cell type	LiFePO4				
Standard charge voltage	54.6V(adjustable)				
Max charge current	50A				
Discharge cut-off voltage	42.5V(adjustable)				
Max discharge current	50A				
Display	LCD(Optional)				
Communication interface	CAN/RS485/RS232				
Cycle life	>6000 Cycles (80%DOD)				
Charge temperature range	0~45°C				
Discharge temperature range	-20~60°C				
Color	Black				
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U		
Weight	About 35Kg	About 42Kg	About 84Kg		
Installation method	Rack Mount				

Cell Specification of Rackmount Lithium Battery




#	Item	Parameter
A	Height	119±1.0 mm
В	Width	160±1.0 mm
С	Thickness	≤ 50 mm
D	Tabs Distance	97±0.5 mm

Operation Pannel of Rackmount Lithium Battery

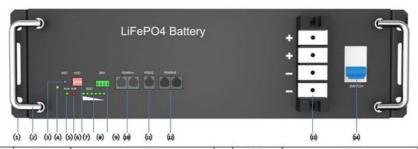


#	Item	Function	#	Item	Function
(1)	Case Hanger	mount in 19 inch cabinet or anti-seismic rake	(8)	SOC Indicator	indicate battery capacity percentage
(2)	Handle	easy to handle, move and install	(9)	Dry Contact	remote on/off control by signal wires
(3)	Reset Switch	restart and wake up the battery	(10)	Comm. Port	RS485+RS232
(4)	On/Off Indicator	turn on/off green and indicate battery on/off	(11)	Comm. Port	RS232
(5)	Working Indicator	turn on green and indicate normal operation	(12)	Comm. Port	RS485+RS232
(6)	Alarm Indicator	turn on red when there is alarm or failure	(13)	Terminal Bar	charge and discharge terminal
(7)	DIP Switch	define battery IP for parallel connection	(14)	DC Switch	turn battery on/off

Size of Rackmount Lithium Battery

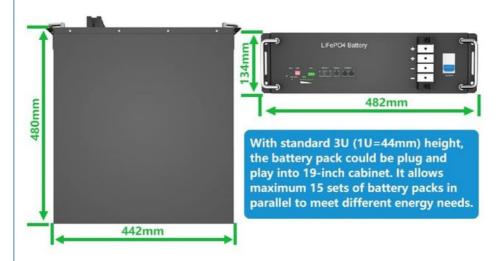

Structure of Rackmount Lithium Battery



#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shel
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	1
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	1

Application of Rackmount Lithium Battery

Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

What We Offer?

Supply chain solution, strict quality control, real-time response OEM/ODM Manufacturer, custom sizes and shapes available on request Suggestion of new design or material, new technology and cost structure Engineers team at your service Flexible small orders are acceptable



XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.



+86 18620492985



sales@esslithiumbattery.com



esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China